


**Filter Code Translation:**

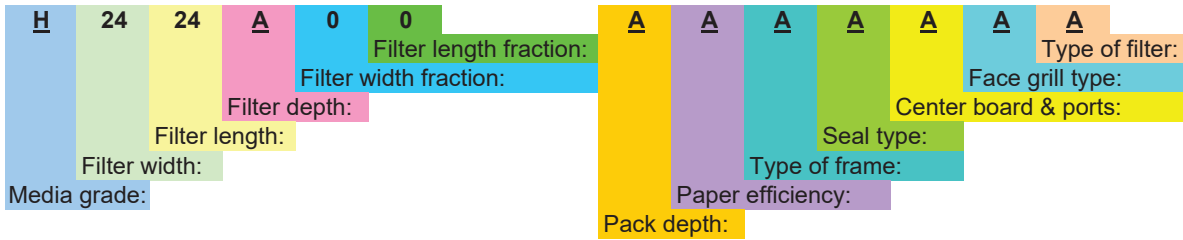

**Media grade:** H= Hepa  
 U= Ulpa  
 A= Ashrae  
 D= Dop

**Filter depth:** A= 3  
 B= 3 1/2  
 C= 5 7/8  
 D= 11 1/2  
 E= 4 1/2  
 F= 4  
 G= 5 1/2  
 H= 5  
 I= 4 1/8  
 J= 2  
 K= 6 1/2  
 L= 6  
 M= 12 1/2  
 N= 5 3/4  
 P= 3 1/4  
 Q= 2 1/2  
 R= 2 1/4  
 S= Special  
 T= 9  
 U= 10  
 V= 14  
 W= 3 3/8  
 X= 1 11/16  
 Y= 4 3/4  
 Z= 7 3/4

**Filter width & length:**  
 0= 0  
 1= 1/8  
 2= 1/4  
 3= 3/8  
 4= 1/2  
 5= 5/8  
 6= 3/4  
 7= 7/8  
 8= 5/16  
 9= 15/16

**Pack depth:** A= 2  
 B= 2 3/4  
 C= 4  
 D= 5  
 E= 1 1/4  
 F= 1  
 G= 3  
 H= 3 5/8  
 J= 1 5/8  
 K= 1 1/8  
 L= 13/16  
 M= 3/4  
 N= 1 3/4  
 O= 3 1/2  
 P= 3 7/8

**Paper efficiency:**  
 A= 99.99%  
 B= 99.97%  
 C= 99.99-4470  
 D= 99.9995%  
 E= 95% dop  
 F= 95% ashrae  
 G= 85% ashrae  
 H= 99.999%  
 K= 55% ashrae  
 L= 99.9999%  
 O= 99.9995% LoBoron

**Type of frame:**  
 A= Extruded alum.  
 B= Wood  
 C= Galvaneal  
 D= Stainless  
 E= Plastic  
 F= Fabricated mill alum  
 G= Tubing  
 J= Plywood  
 K= Fabricated anod. alum.  
 S= Special

**Seal type:**  
 A= d/s gasket  
 B= u/s gasket  
 C= gask both sides  
 D= knife edge  
 E= ds/sil-gel  
 F= None  
 G= Side  
 H= Loose  
 J= us/sil-gel  
 K= ds/u-gel  
 L= us/u-gel  
 M= ds/sil-gel/rf  
 N= ds/sil & d/s gask  
 P= us/sil-gel/rf

**Center board & ports:**  
 A= None  
 B= 1 Center board  
 C= 1 C/B with ports  
 D= 2 Center boards  
 E= wood cb/0  
 F= wood cb/1  
 G= poly cb/2

**Face grill type:**  
 A= None  
 B= White expanded d/s  
 C= Black d/s  
 D= Stainless expanded  
 E= Stainless perforated  
 F= White exp. Both sides  
 G= Plastic d/s  
 H= Eggcrate acrylic  
 J= Aluminum Perforated  
 K= White expanded u/s  
 L= Stainless exp. b/s  
 M= Alum perf b/s  
 N= Alum Expanded  
 O= Alum Square Perf  
 P= SS Perf/Both

**Type of filter:** A= Panel  
 B= Muk wood modular  
 C= T-Modular  
 D= UL filter  
 E= Terminal filter mod.  
 F= V-Cell  
 G= T-Mod special  
 J= AT2000 RSR  
 K= At2000  
 L= VFAT2000 RSR  
 M=VFAT2000  
 S= Special